

## Space-saving Dual Output Signal Conditioners Mini-MW Series


### ISOLATOR

#### Functions & Features

- Galvanically isolating the input and output signals
- Universal power input
- High-density mounting

#### Typical Applications

- Isolation between control room and field instrumentation
- Eliminating ground loops



### MODEL: W2YV-[1][2][3]-[4][5]

#### ORDERING INFORMATION

• Code number: W2YV-[1][2][3]-[4][5]

Specify a code from below for each [1] through [5].  
(e.g. W2YV-6A6-M/Q)

• Specify the specification for option code 'Q.'  
(e.g. /C01 /V01)

Note: If one of the outputs should be a current range, specify it for the Output 1 to allow a greater load.

#### [1] INPUT

##### Current

A: 4 - 20 mA DC (Input resistance 250 Ω)

##### Voltage

6: 1 - 5 V DC (Input resistance 1 MΩ min.)

#### [2] OUTPUT 1

##### Current

A: 4 - 20 mA DC (Load resistance 750 Ω max.)

##### Voltage

6: 1 - 5 V DC (Load resistance 5000 Ω min.)

#### [3] OUTPUT 2

Y: None

##### Current

A: 4 - 20 mA DC (Load resistance 350 Ω max.)

##### Voltage

6: 1 - 5 V DC (Load resistance 5000 Ω min.)

#### [4] POWER INPUT

##### AC Power

M: 85 - 264 V AC (Operational voltage range 85 - 264 V, 47 - 66 Hz)

##### DC Power

R2: 11 - 27 V DC

(Operational voltage range 11 - 27 V, ripple 10 %p-p max.)

#### [5] OPTIONS

blank: none

/Q: With options (specify the specification)

#### SPECIFICATIONS OF OPTION: Q (multiple selections)

##### COATING (For the detail, refer to M-System's web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

##### ADJUSTMENT

/V01: Multi-turn fine adjustment

##### TERMINAL SCREW MATERIAL

/S01: Stainless steel

#### GENERAL SPECIFICATIONS

Construction: Plug-in

Connection: M3 screw terminals (torque 0.8 N·m)

Screw terminal: Chromated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)

Isolation: Input to output 1 to output 2 to power

Overrange output: Approx. -10 to +120 % at 1 - 5 V

Zero adjustment: -5 to +5 % (front)

Span adjustment: 95 to 105 % (front)

Adjustable individually for each output 1 and output 2.

#### INPUT SPECIFICATIONS

■ DC Current:

Shunt resistor attached to the input terminals (0.5 W)

#### INSTALLATION

##### Power Consumption

•AC:

Approx. 4 VA at 100 V

Approx. 5 VA at 200 V

Approx. 6 VA at 240 V

•DC: Approx. 3 W

Operating temperature: -5 to +55°C (23 to 131°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Surface or DIN rail

**Weight:** 200 g (0.44 lb)

## PERFORMANCE in percentage of span

**Accuracy:**  $\pm 0.1\%$

**Temp. coefficient:**  $\pm 0.015\%/^{\circ}\text{C}$  ( $\pm 0.008\%/^{\circ}\text{F}$ )


**Response time:**  $\leq 0.5$  sec. (0 - 90 %)

**Line voltage effect:**  $\pm 0.1\%$  over voltage range

**Insulation resistance:**  $\geq 100\ \text{M}\Omega$  with 500 V DC


**Dielectric strength:** 2000 V AC @1 minute (input to output  
1 to output 2 to power to ground)

## DIMENSIONS unit: mm (inch)

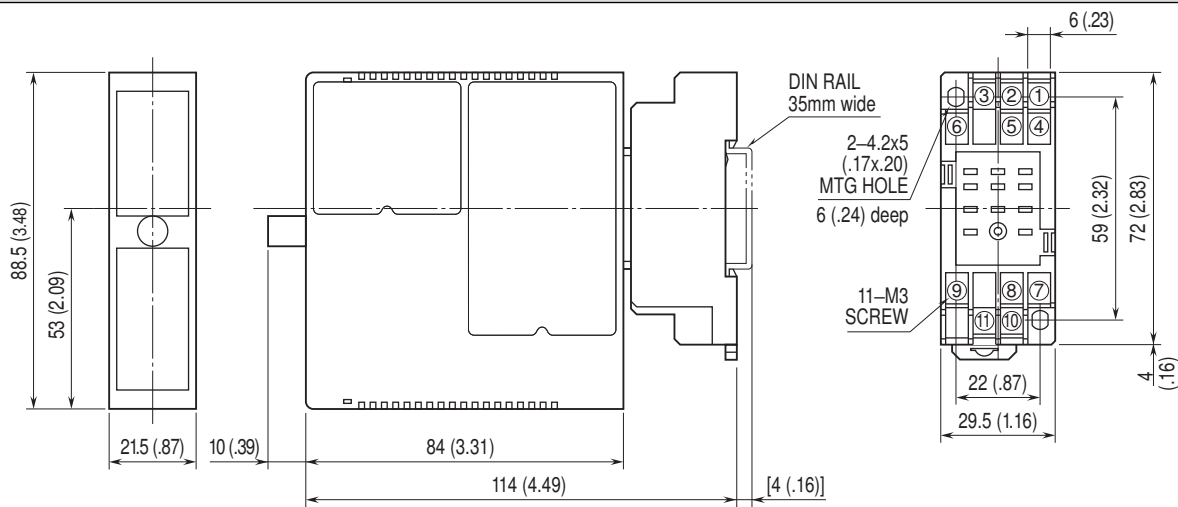


When mounting, no extra space is needed between units.

## TERMINAL ASSIGNMENTS unit: mm (inch)

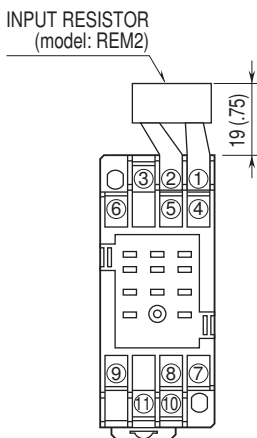

Input shunt resistor attached for current input.

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

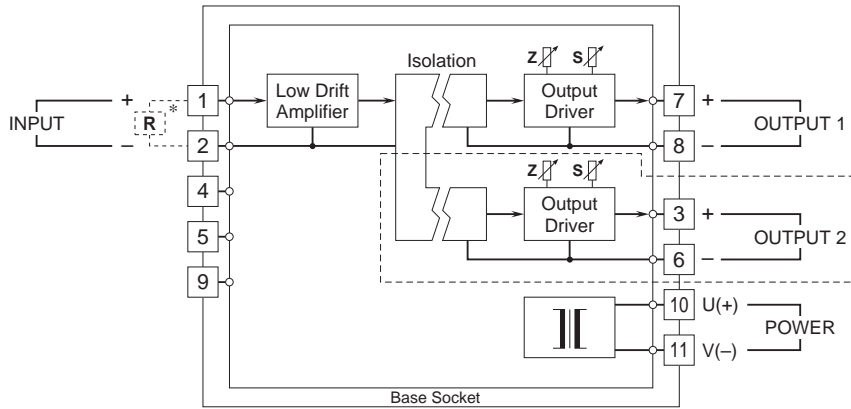

\*Input shunt resistor attached for current input.

Remark: The section enclosed by broken line is only with 2nd output option.



Specifications are subject to change without notice.