



## FEATURES


- Miniature dimension
- Stainless steel construction
- Tension application
- Application for limited space
- Protection class IP67

## SPECIFICATIONS

Max. capacity	kgf	50, 100, 200, 500,1000,2000
Rated output	mV/V	2.0 ± 0.005
Zero balance	mV/V	0 ± 0.06
Combined error	%	0.15
Repeatability	%	0.05
Creep for 30 min.	%	0.03
Temperature effect on		
Zero Value	%/10°C	0.05
Output value	%/10°C	0.10
Excitation		
Recommended	V	10
Maximum	V	15
Resistance		
Input	Ω	420 ± 30
Output	Ω	350 ± 3.5
Insulation	MΩ	> 2,000
Compensated temperature range	°C	-10 to +40
Operating temperature range	°C	-20 to +80

## DIMENSIONS

### 50kg~500kg

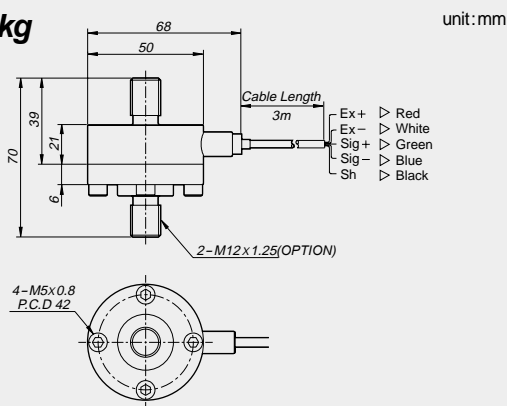

### Material

Stainless Steel

### Cable


Braided shield 4-wire round cable with Urethane-Jacket

### Ordering Information

MNT - XXXL

Capacity in kg

### 1ton~2ton

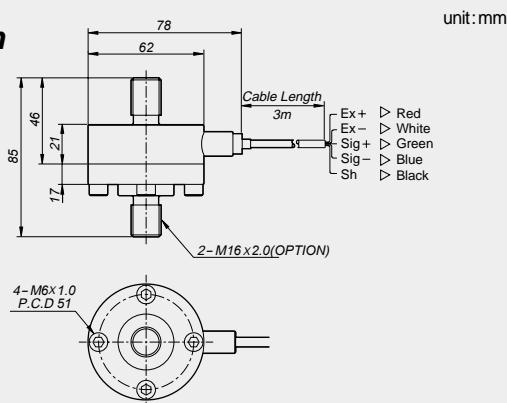

### Ordering Information

MNT - XT

Capacity in ton