




CDP-B

Shaft부분에 Bellows로 보호되어 있어
환경조건이 열악한 현장에서 사용이 용이한 변위계

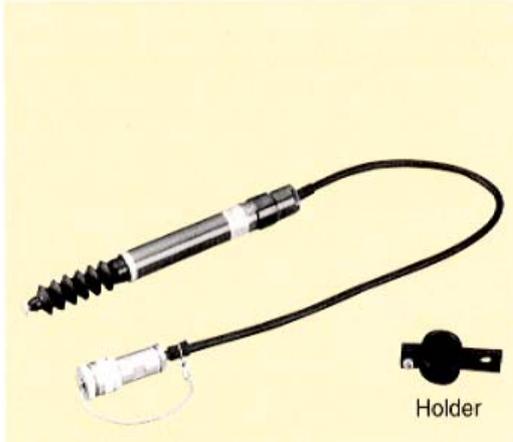

* 특징


- 뛰어난 내환경성을 발휘
- 고감도, 고출력

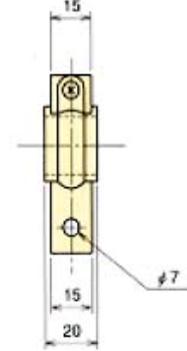

▶ 사양서

Type	CDP-5B	CDP-10B	CDP-25B
용 량 (mm)	5	10	25
정격출력	5mV/V(10000X10 ⁻⁶)±0.1%		6.25mV/V(12500X10 ⁻⁶)±0.1%
민감도 (x10 ⁻⁶ /mm)	2000	1000	500
비직선성	0.15%RO	0.1%RO	
측정력	6.4N	3.4N	
응답주파수(Hz)	40Hz	12Hz	5Hz
영점의 온도영향	1X10 ⁻⁶ /°C (0~+40°C)		
허용온도범위	0~+60°C		
입출력 저항	350Ω		
권장인가전압	Less than 2V		
허용인가전압	10V		
부속케이블	JR-9510 (Φ6mm 0.35mm ² 4-core Shielded Vinyl Cable 10m)		
Holder	1 pc. Supplied		

▶ Size

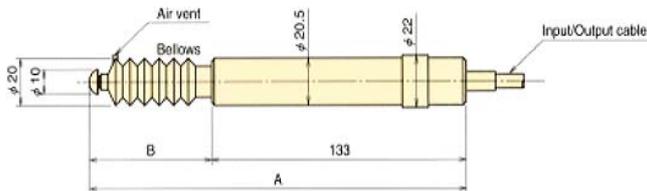

Type	A	B	무게(g)
CDP-5B	197	64	130
CDP-10B	198	65	130
CDP-25B	208	75	140