



### FEATURES

- Robust design and easy installation
- Strong against shock or side force
- Surge protected
- Rotation protected
- Protection class IP68


### Material

- Stainless steel

### Cable

- Braided shield 4-wire round cable with PVC - jacket

### DIMENSIONS

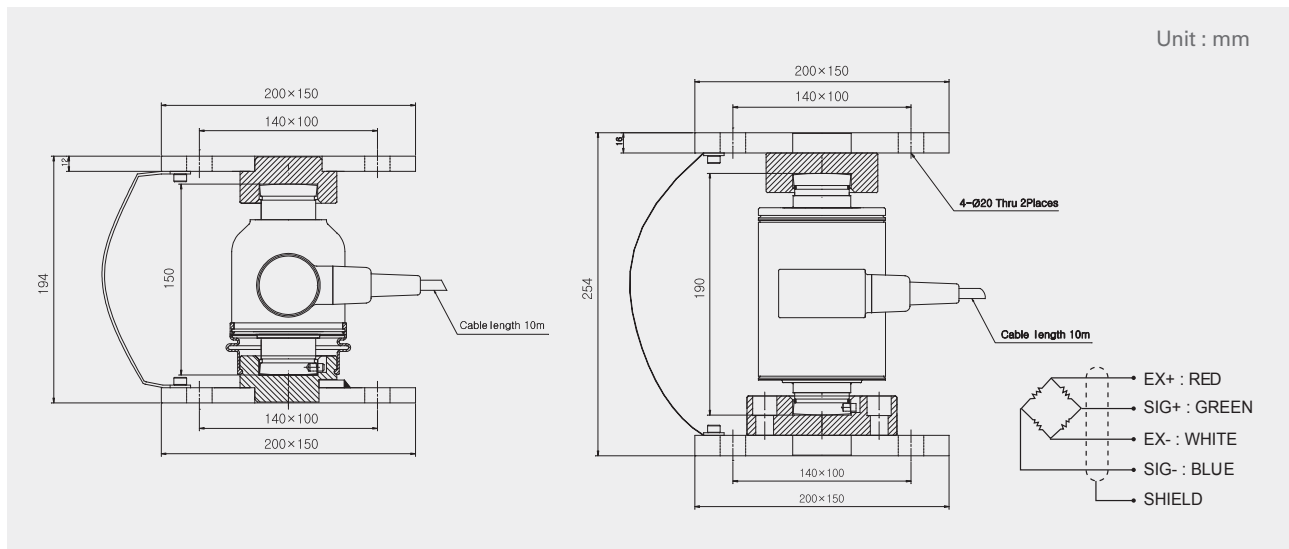

### SPECIFICATIONS

Max. Capacity		tf	25, 30, 50 tf	
Rated output		mV/V	2.0 ± 0.005	
Zero balance		mV/V	0 ± 0.03	
Accuracy class			D3	C3
Combined error		%RO	0.03	0.02
Repeatability		%RO	0.02	0.01
Creep (30min.)		%RO	0.03	0.017
Temperature effect on				
Zero value		%RO/10°C	0.03	0.014
Output value		%RO/10°C	0.03	0.011
Excitation				
Recommended		V	10	
Maximum		V	15	
Resistance				
Input		Ω	350 ± 3.5	
Output		Ω	350 ± 3.5	
Insulation		MΩ	> 2,000 @50V DC	
Compensated temp. range		°C	-10 ~ +40	
Operating temp. range		°C	-20 ~ +80	